

High-Speed Data Communication

LA302Z – 10 GHz Differential Limiting Amplifier

16-pin Plastic QFN Package


PRODUCT DESCRIPTION

The LA302Z is an ultra-broadband fully differential limiting amplifier designed for high-speed wide-band communication applications up to 10 Gb/s. The amplifier has an excellent input sensitivity of 2.5 mV_{pp} and a small-signal bandwidth of 10 GHz. Its wide bandwidth and high sensitivity ensure a low bit error rate in high-speed data communication. Its lost-of-signal detector can warn the receiver as the incoming signal is too small for a certain bit error rate. The device can be used as an input sensing amplifier, a repeater, and a wide-band single-ended-to-differential converter.

KEY FEATURES

- 37-dB gain
- 10 GHz bandwidth
- < 2.5 mV_{pp} single-ended/differential input sensitivity
- Differential 50-Ω inputs and outputs
- 750m-V_{pp} maximum differential output swing
- Lost-of-Signal (LOS) detector
- Output waveform envelope detector
- Output waveform crossing control
- Power consumption: 0.3 W with +5 V single power supply

BLOCK DIAGRAM

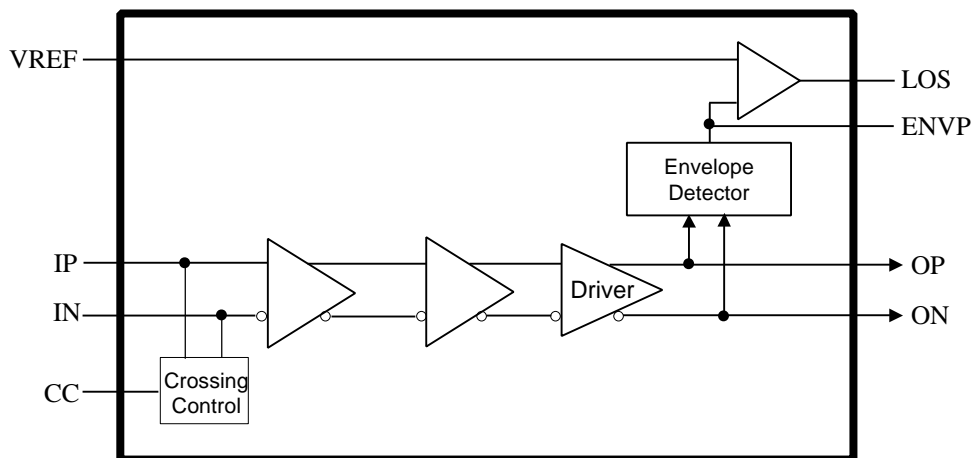

ELECTRICAL SPECIFICATIONSTesting Condition: $V_{CC} = 5\text{ V}$

Parameter	Symbol	Min	Typical	Max	Unit
Operating Temperature	T_o	-40	25	85	°C
Small-Signal Max Gain ¹	$G_{o,max}$	38	43		dB
Small-Signal 3-dB Bandwidth	$f_{3dB,max}$	8.3	10		GHz
Output Swing ¹ ($R_L=50\Omega$)		600	750		mV _{pp}
Worst Input Return Loss ²	RL_I	5		8	dB
Worst Output Return Loss ²	RL_O	3		7	dB
Output Rise Time ³	T_r	31		36	ps
Output Fall Time ³	T_f	22		26	ps
Output Overshoot			0		%
Output Jitter, RMS ⁴		1.2		1.6	ps
Sensitivity ⁵	V_{sen}		2.5		mV _{pp}
Output DC Offset ⁶	V_{off}		5	10	mV
Positive V_{CC} supply Voltage	V_{CC}	4.5	5	5.5	V
Positive V_{CC} supply Current	I_{total}	50	60	70	mA

¹ differential I/O² DC to f_{3dB} measured on an evaluation board with SMA connectors³ 20%~80%⁴ for Input 500 mVpp, single ended⁵ where bit error rate $< 10^{-12}$ with $2^{31}-1$ pseudo-random data⁶ measured with zero inputs



TERMINAL DESCRIPTION

Name	Function	I/O	Signal
VEE	Ground		DC
VCC	Power, +5 V		DC
IP	Data Input+	I	RF
IN	Data Input-	I	RF
CC	Output Crossing Control	I	DC
OP	Output +	O	RF
ON	Output -	O	RF
LOS	Lost-Of-Signal Detector	O	DC
VCS	VCS Generator Bypass	O	DC
ENVP	Output Swing Envelope	O	DC
VREF	Reference Voltage for LOS	I	DC


PIN ARRANGEMENTS AND PACKAGE INFORMATION

- Unit: mm
- Package Format: 16-pin QFN
- Package Size: 3 mm x 3 mm
- Pin Pitch: 0.5 mm

Top View

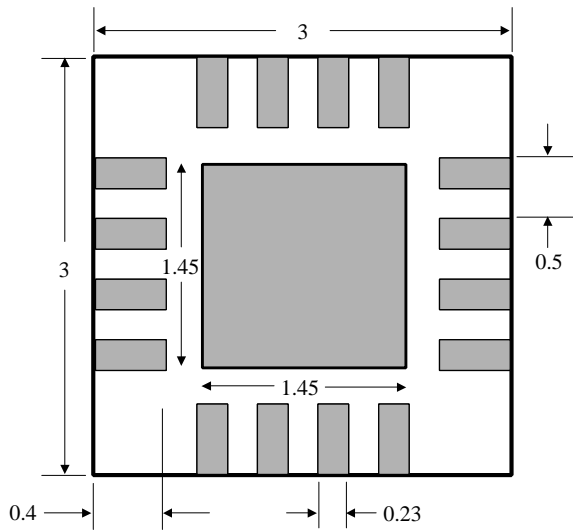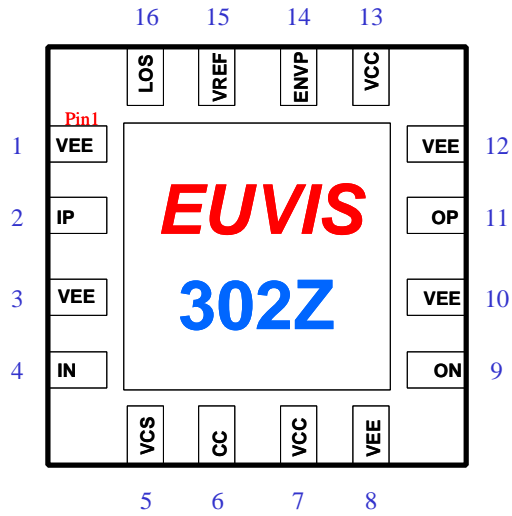


Bottom View

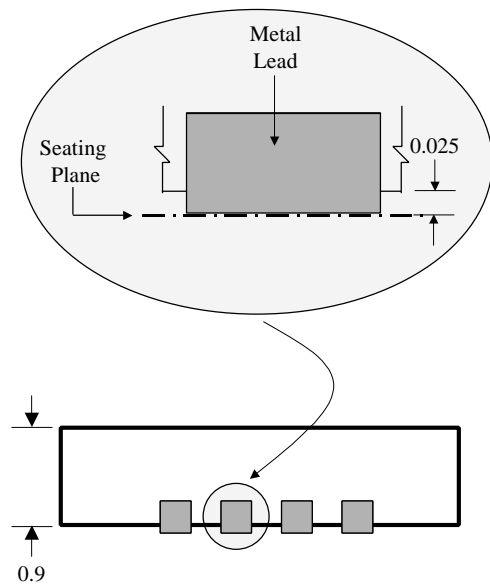

Side View

TYPICAL CONNECTION

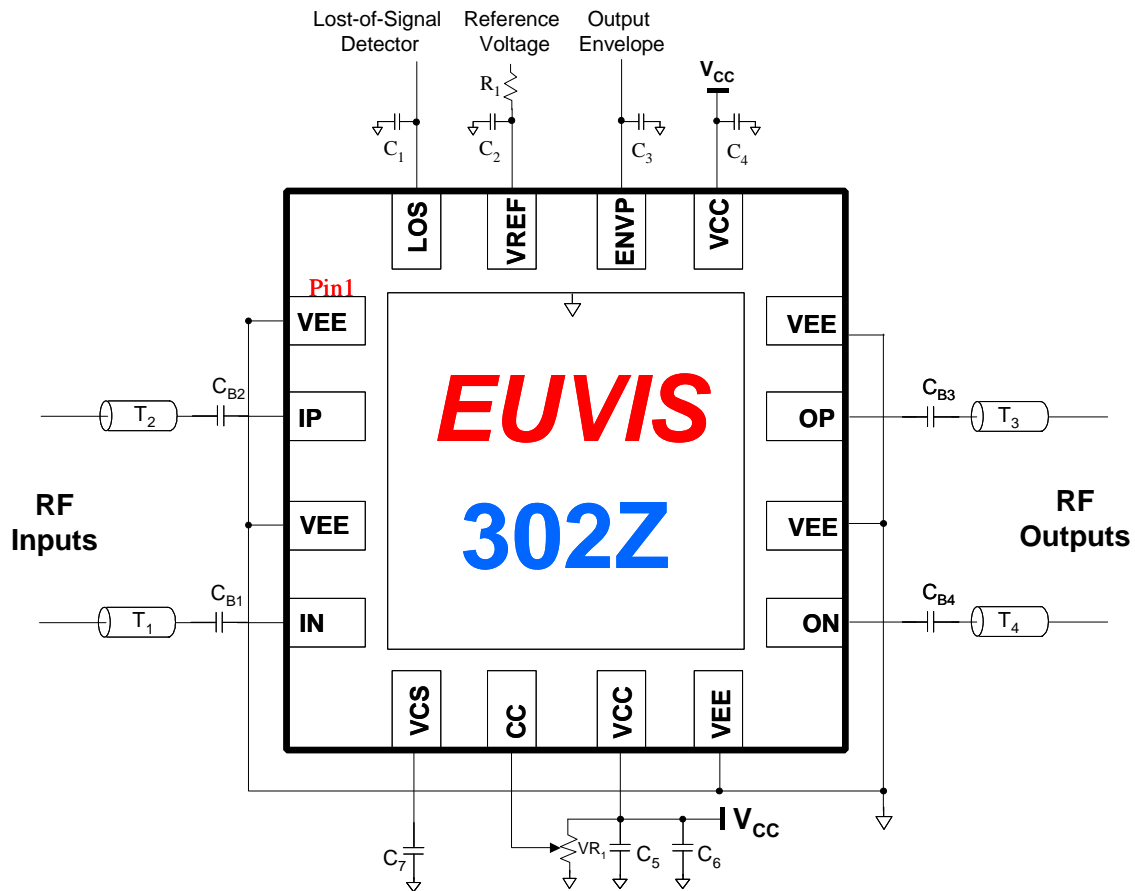**Notes:**

V_{CC} is +5 V

V_{EE} 's are connected to power supply and package ground

Center pad of package is connected to ground

$T_1 \sim T_4$: 50- Ω transmission lines

VR_1 : 50-k Ω potentiometer

R_1 : 1-k Ω surface-mount resistor


$C_1 \sim C_5$ and C_7 : 100-nF surface-mount capacitors

C_6 : 10- μ F capacitor

$C_{B1} \sim C_{B4}$: 100-nF by-pass surface-mount capacitors


EYE DIAGRAM MEASUREMENT

The following figures show the typical eye diagrams with differential inputs of 2 V_{pp}, 500 mV_{pp}, 50 mV_{pp} and 5mV_{pp}. The measurements are with 10-Gb/s 2³¹-1 pseudo-random bit sequences.

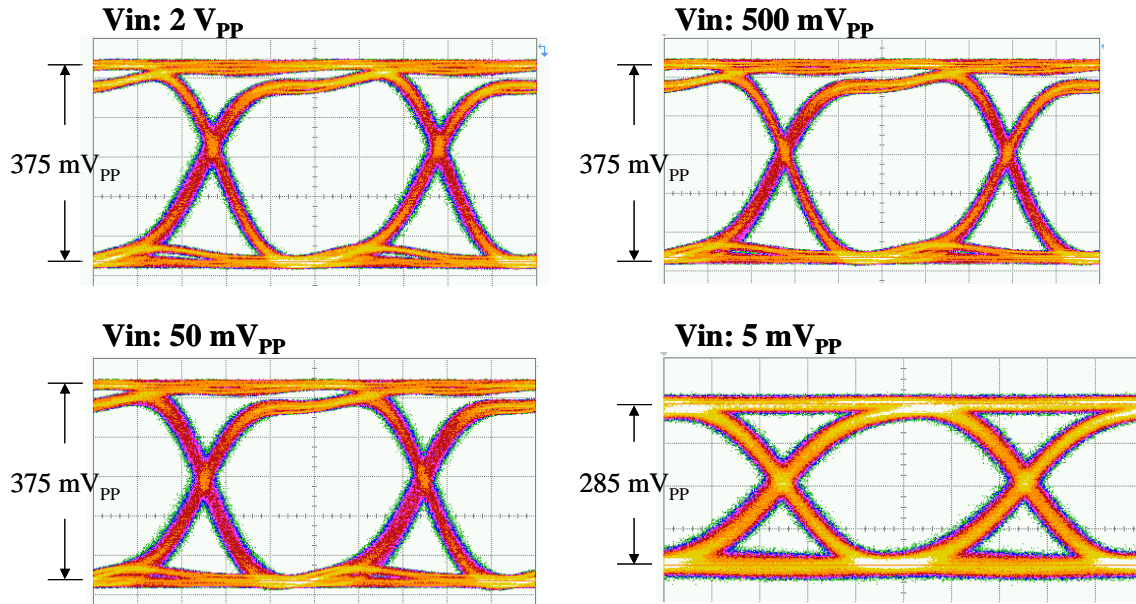


The minimum sensitivity is tested with a 2.5 mV_{pp} single-ended input at 85°C, 25°C and -40°C, respectively. The bit error rate (BER) is measured less than 10⁻¹² with 10-Gb/s 2³¹-1 pseudo-random bit sequences.


AT 85 °C

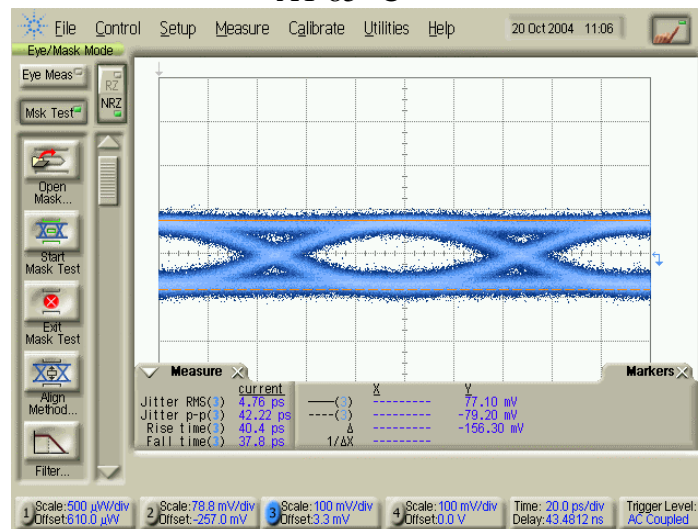

At 25°C

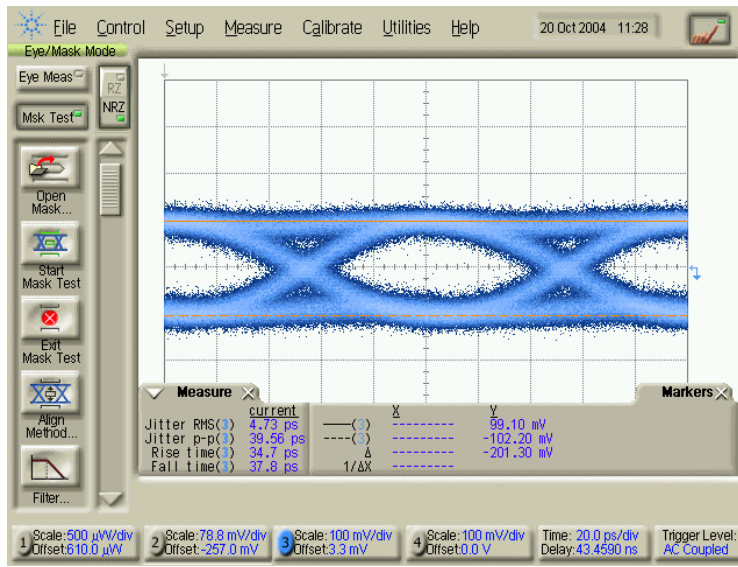

At -40°C

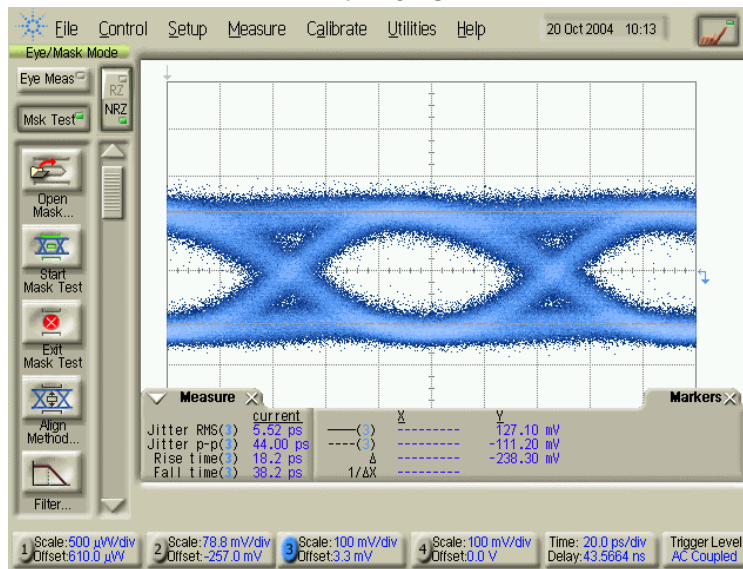

Euvis

Ordering Information:

Email to: Sales@euvis.com

Or call: (805) 583-9888 x108 Sales Department

Or fax: (805) 583-9889

The information contained in this document is based on product test results. Characteristic data and other specifications are subject to change without notice. Customers are advised to confirm information in this advanced datasheet prior to using this information or placing the order.

Euvis Inc. does not assume any liability arising from the application or use of any product or circuit described herein, neither does it convey any license under its patents or any other rights.